AC/DC Converter
A10-C4SXX Series

Typical Features

- ◆ Wide input voltage range: 85-305VAC/120-430VDC
- ◆ No load power consumption ≤ 0.45W
- ◆ Transfer Efficiency 78%(TYP.)
- ◆ Switching Frequency: 65KHz
- ◆ Protections: short circuit, over current
- ◆ Isolation voltage: 3600Vac
- ◆ Meet IEC62368/UL62368/EN62368 test standard
- ◆ Ultra-small package for bare board, industrial design
- ◆ PCB mounting



Application Field

A10-C4SXX Series----- *a compact size, high efficient power module offered by Aipu.*
It features universal input voltage range, AC and DC dual-use, low ripple, low temperature rise, low power consumption, high efficiency, high reliability, safer isolation, good EMC performance. EMC and Safety standard meet international EN55032 ,IEC/EN61000. These series have important application for power, industry, instrument and smart home field. For harsh EMC environment, the application circuit in the datasheet is strongly recommended.

Typical Product List

Certificate	Part No.	Output Specifications			Max. Capacitive Load	Ripple& Noise 20MHz (Max)	Efficiency@ Full Load, 220Vac (Typical)
		Power	Voltage	Current			
		(W)	Vo(V)	Io(m A)	u F	mVp-p	%
-	A10-C4S03	6.6	3.3	2000	800	100	72
-	A10-C4S05	10	5	2000	800	100	78
-	A10-C4S09	10	9	1111	400	120	80
-	A10-C4S12	10	12	833	300	120	82
-	A10-C4S12V5	10	12.5	800	300	120	82
-	A10-C4S15	10	15	667	300	120	82
-	A10-C4S24	10	24	416	47	150	84

Note 1: Due to space limitations, above is only a part of our product list, please contact our sales team for more items.

Note 2: The typical value of output efficiency is based on module is full loaded and burned-in after half an hour.

Note 3: "*" are models being developing.

Note 4: The fluctuation range of full load efficiency(%,TYP) in table is ±2%, full load efficiency= output power/module's input power.

Note 5: Ripple & Noise is tested by twisted pair method, details please refer to Ripple & Noise test at back.

Input Specifications

Item	Operating Condition	Min	Typ.	Max	Unit
Input Voltage Range	AC input	85	220	305	VAC
	DC input	120	310	430	VDC

Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation.

Input Frequency range	-	47	50	63	Hz
Input Current	115VAC	-	-	0.20	A
	220VAC	-	-	0.15	
Surge Current	115VAC	-	-	20	
	220VAC	-	-	35	
Leakage Current	-	0.25mA TYP/ 230VAC/ 50Hz			
Recommended External Input Fuse	-	1A-3A/ 300VAC slow fusing			
Hot Plug	-	Unavailable			
Remote Control Terminal	-	Unavailable			

Output Specifications

Item		Operating Condition		Min	Typ.	Max	Unit
Voltage Accuracy		Full input voltage range, 10-100% load (0%-10% load, could work if output stable)	3.3V	-	±2.0	±7.0	%
			Others	-	±2.0	±5.0	
Line Regulation		Nominal load	Vo	-	±0.75	±1.5	%
Load Regulation		Nominal input voltage, 20%~100% load	Vo	-	±1.5	±3.0	%
No Load Consumption		Input 115VAC		-	-	0.45	W
		Input 220VAC		-	-		
Minimum Load		Single Output		10	-	-	%
Start up Delay Time		Nominal input voltage (full load)		-	1000	-	mS
Power-off Holding Time		Input 115VAC (full load)			50		mS
		Input 220VAC (full load)		-	80	-	
Dynamic Response	Overshoot range	25%~50%~25% 50%~75%~50%		-5.0	-	+5.0	%
	Recovery time			-5.0	-	+5.0	mS
Output Overshoot		Full input voltage range		≤10%Vo			%
Short circuit Protection				Continuous, self-recovery			Hiccup
Temperature Drift		-		-	±0.03%	-	%/℃
Over Current Protection		Input 220VAC		⩾110% Io, self-recovery			Hiccup
Ripple & Noise		Input full voltage range		-	50	150	mV

Note: The ripple and noise test method uses the twisted pair test method. For specific test methods and matching, please see the following (Ripple & Noise Test Instructions)

General Specifications

Item	Operating Condition	Min	Typ.	Max	Unit
Switching Frequency	-	-	65	-	KHz
Operating Temperature	-	-20	-	+105	℃


Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation.

Storage Temperature		-	-40	-	+110	
Soldering Temperature		Wave soldering	260±4℃, time 5-10S			
		Manual soldering	360±8℃, time 4-7S			
Relative Humidity		-	10	-	90	%RH
Isolation Voltage	I/P-O/P	Test 1min, leakage current≤5mA	3600	-	-	VAC
Insulation Resistance		@ DC500V	100	-	-	MΩ
Safety Standard		-	EN62368、IEC62368			
Vibration		-	10-55Hz,10G,30Min,along X,Y,Z			
Safety Standard		-	CLASS Ⅱ			
MTBF		-	MIL-HDBK-217F@25℃＞300,000H			

EMC Characteristics

Total Item		Sub Item	Test Standard	Class
EMC	EMI	CE	CISPR22/EN55032	CLASS B (Recommended Circuit 2)
		RE	CISPR22/EN55032	CLASS B (Recommended Circuit 2)
	EMS	RS	IEC/EN61000-4-3	10V/m Perf.Criteria B (Recommended Circuit 1)
		CS	IEC/EN61000-4-6	10Vr.m.s Perf.Criteria B (Recommended Circuit 1)
		ESD	IEC/EN61000-4-2	Contact ±6KV / Air ±8KV Perf.Criteria B
		Surge	IEC/EN61000-4-5	±1KV Perf.Criteria B
		EFT	IEC/EN61000-4-4	±2KV Perf.Criteria B
		Voltage dips and interruptions	IEC/EN61000-4-11	0%~70% Perf.Criteria B

Dimension

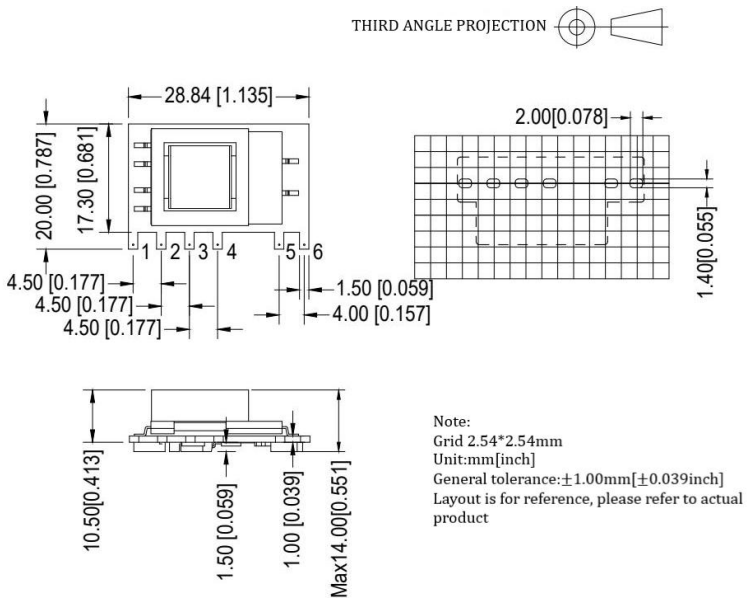

Packing Code	L x W x H	
-	28.84 x 20.0 x 14.0 mm	1.135 × 0.787 × 0.551 inch

Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation.

Pin Specification


Pin	1	2	3	4	5	6
Single(S)	AC(L)	AC(N)	+Vc	-Vc	-Vo	+Vo

Ripple& Noise Test: (Twisted Pair Method 20MHZ bandwidth)


Test Method:


(1) 12# twisted pair to connect, Oscilloscope bandwidth set as 20MHz, 100M bandwidth probe, terminated with 0.1uF polypropylene capacitor and 10uF high frequency low resistance electrolytic capacitor in parallel, oscilloscope set as Sample pattern.

(2) Input terminal connect to power supply, output terminal connect to electronic load through jig plate, Use 30cm±2 cm sampling line, Power line selected from corresponding diameter wire with insulation according to the flow of output current.

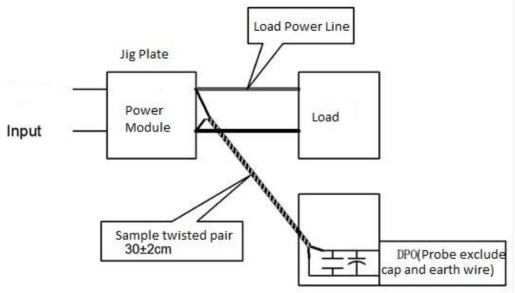

Product Characteristic Curve

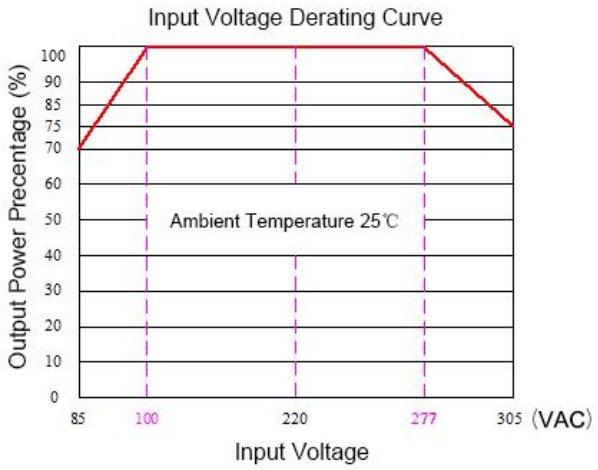

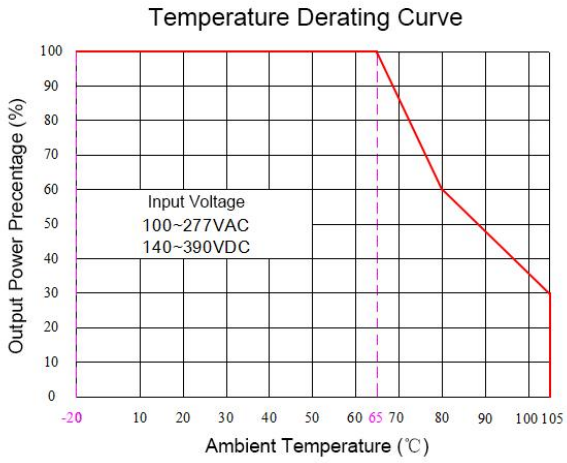


Note 1: Input Voltage should be derated based on Input voltage derating curve when it is 85~100VAC/277~305VAC/120~140VDC/390~430VDC.

Note 2: Our product is suitable to use under natural air cooling environment, if use it under closed condition, please contact with us.

Typical Application Circuit and EMC Recommended Circuit

1. Typical Application Circuit

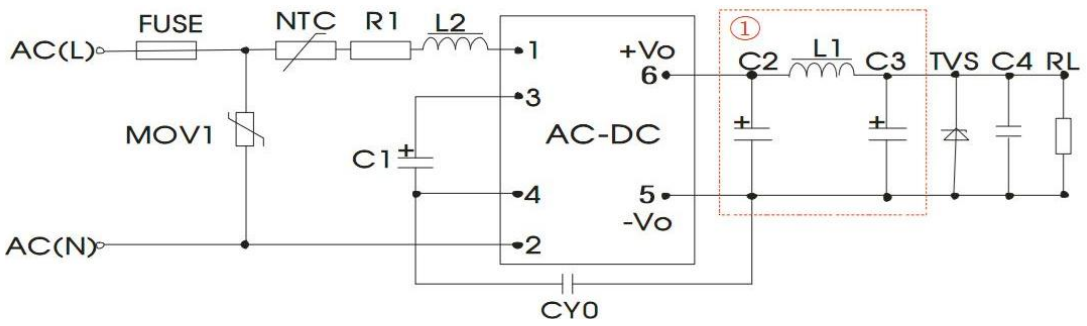

Recommended Circuit 1

Note: ① as Pi filter circuit


Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation.

Prodcts Number	C1 (Necessary)	C2 (Necessary to connect the external solid-state capacitor)	L1 (Necessary)	C3 (Necessary to connect the external solid-state capacitor)	C4	L2	NTC	CY0	FUSE (Necessary)	TVS Tube
A10-C4S03	22uF /450V	820uF/10V	2.0uH	330uF/10V	0.1uF/ 50V	4.7m H	5D-9	1nF/ 400V	2A/ 250V	SMBJ7.0A
A10-C4S05		820uF/10V		330uF/10V						SMBJ7.0A
A10-C4S09		470uF/16V		100uF/16V						SMBJ20A
A10-C4S12		470uF/16V		100uF/16V						SMBJ20A
A10-C4S12V5		470uF/16V		100uF/16V						SMBJ20A
A10-C4S15		470uF/25V		100uF/25V						SMBJ20A
A10-C4S24		220uF/35V		47uF/35V						SMBJ30A

Note:

1) C1: AC input, C1 is input filter electrolytic capacitor (necessary), recommended value is 22uF/450V;
   DC input, C1 is big filter capacitor in the EMC filter (necessary), recommended value is 22uF/450V;
2) R1 is limited resistor, recommended value is 6.8Ω/3W;
3) MOV1 is piezoresistor, recommended model is 14D561K;

2. EMC recommended circuit (Used Under high EMC requirement)

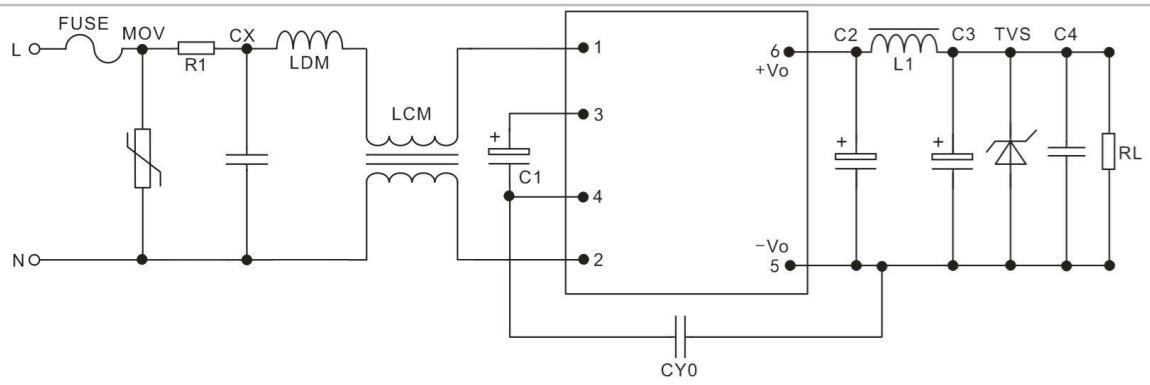

Recommended Circuit 2

FUSE	Recommend 2A, 300V (Necessary)	CY0,CY1,CY2	1nF/400VAC
MOV	14D561K	LDM	330uH
CX	Recommended 0.22uF/310VAC	R1	winding resistor 6.8Ω/3W
LCM	1.2mH/ MAX:2.5Ω/ MIN:0.35A		

Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation.

Note 1:

1. The product should be used within the specification range, or it will cause permanent damage to it;
2. The input terminal should connect to fuse;
3. If the product is worked under the minimum requested load, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
4. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
5. Unless otherwise specified, parameters in this datasheet were measured under the conditions of **Ta=25℃**, **humidity<75%** with nominal input voltage and rated output load(pure resistance load);
6. All index testing methods in this datasheet are based on our Company's corporate standards;
7. The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, please directly contact our technician for specific information;
8. We can provide product customization service,
9. Specifications are subject to change without prior notice, please follow up with our website for newest manual.

Guangzhou Aipu Electron Technology Co., Ltd
Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.
Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821
E-mail: sales@aipu-elec.com Website: https://www.aipupower.com

Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation.