


Current Transducer LA 200-P

$$I_{PN} = 200 \text{ A}$$

For the electronic measurement of currents : DC, AC, pulsed..., with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



Electrical data

I_{PN}	Primary nominal r.m.s. current	200	A																																												
I_P	Primary current, measuring range	0 .. ± 300	A																																												
R_M	Measuring resistance @	<table><tr><th colspan="2">$T_A = 70^{\circ}\text{C}$</th><th colspan="2">$T_A = 85^{\circ}\text{C}$</th></tr><tr><th>$R_{M \min}$</th><th>$R_{M \max}$</th><th>$R_{M \min}$</th><th>$R_{M \max}$</th></tr><tr><td colspan="4">with $\pm 12 \text{ V}$</td></tr><tr><td></td><td>@ $\pm 200 \text{ A}_{\max}$</td><td>0</td><td>30</td><td>0</td><td>26</td><td>Ω</td></tr><tr><td></td><td>@ $\pm 250 \text{ A}_{\max}$</td><td>0</td><td>8</td><td>0</td><td>4</td><td>Ω</td></tr><tr><td colspan="4">with $\pm 15 \text{ V}$</td></tr><tr><td></td><td>@ $\pm 200 \text{ A}_{\max}$</td><td>0</td><td>60</td><td>0</td><td>56</td><td>Ω</td></tr><tr><td></td><td>@ $\pm 300 \text{ A}_{\max}$</td><td>0</td><td>12</td><td>0</td><td>8</td><td>Ω</td></tr></table>	$T_A = 70^{\circ}\text{C}$		$T_A = 85^{\circ}\text{C}$		$R_{M \min}$	$R_{M \max}$	$R_{M \min}$	$R_{M \max}$	with $\pm 12 \text{ V}$					@ $\pm 200 \text{ A}_{\max}$	0	30	0	26	Ω		@ $\pm 250 \text{ A}_{\max}$	0	8	0	4	Ω	with $\pm 15 \text{ V}$					@ $\pm 200 \text{ A}_{\max}$	0	60	0	56	Ω		@ $\pm 300 \text{ A}_{\max}$	0	12	0	8	Ω	
$T_A = 70^{\circ}\text{C}$		$T_A = 85^{\circ}\text{C}$																																													
$R_{M \min}$	$R_{M \max}$	$R_{M \min}$	$R_{M \max}$																																												
with $\pm 12 \text{ V}$																																															
	@ $\pm 200 \text{ A}_{\max}$	0	30	0	26	Ω																																									
	@ $\pm 250 \text{ A}_{\max}$	0	8	0	4	Ω																																									
with $\pm 15 \text{ V}$																																															
	@ $\pm 200 \text{ A}_{\max}$	0	60	0	56	Ω																																									
	@ $\pm 300 \text{ A}_{\max}$	0	12	0	8	Ω																																									
I_{SN}	Secondary nominal r.m.s. current	100	mA																																												
K_N	Conversion ratio	1 : 2000																																													
V_C	Supply voltage ($\pm 5 \%$)	$\pm 12 \dots 15$	V																																												
I_C	Current consumption	16 (@ $\pm 15 \text{ V}$) + I_S	mA																																												
V_d	R.m.s. voltage for AC isolation test, 50 Hz, 1 mn	3	kV																																												

Accuracy - Dynamic performance data

X	Accuracy @ I_{PN} , $T_A = 25^\circ\text{C}$	@ $\pm 15 \text{ V}$ ($\pm 5\%$)	± 0.40	%
		@ $\pm 12 \dots 15 \text{ V}$ ($\pm 5\%$)	± 0.65	%
e_L	Linearity		< 0.15	%
I_O	Offset current @ $I_P = 0$, $T_A = 25^\circ\text{C}$	Typ	Max	
			± 0.20	mA
I_{OM}	Residual current ¹⁾ @ $I_P = 0$, after an overload of $3 \times I_{PN}$		± 0.25	mA
I_{OT}	Thermal drift of I_O	0°C .. +70°C	± 0.10	± 0.25 mA
		- 25°C .. + 85°C	± 0.10	± 0.30 mA
t_{ra}	Reaction time @ 10 % of $I_{P \max}$		< 500	ns
t_r	Response time ^{2) 3)} @ 90 % of $I_{P \max}$		< 1	μs
di/dt	di/dt accurately followed ³⁾		> 200	A/ μs
f	Frequency bandwidth ³⁾ (- 1 dB)		DC .. 100	kHz

General data

T_A	Ambient operating temperature	- 25 .. + 85	°C
T_S	Ambient storage temperature	- 40 .. + 90	°C
R_S	Secondary coil resistance @	$T_A = 70^\circ\text{C}$	76 Ω
		$T_A = 85^\circ\text{C}$	80 Ω
m	Mass	40	g
	Standards ⁴⁾	EN 50178	

Notes : ¹⁾ The result of the coercive field of the magnetic circuit

²⁾ With a di/dt of 100 A/ μs

³⁾ The primary conductor is best filling the through-hole and/or the return of the primary conductor is above the top of the transducer

⁴⁾ A list of corresponding tests is available

Features

- Closed loop (compensated) current transducer using the Hall effect
- Printed circuit board mounting
- Insulated plastic case recognized according to UL 94-V0.

Advantages


- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

980716/6

Dimensions LA 200-P (in mm. 1 mm = 0.0394 inch)

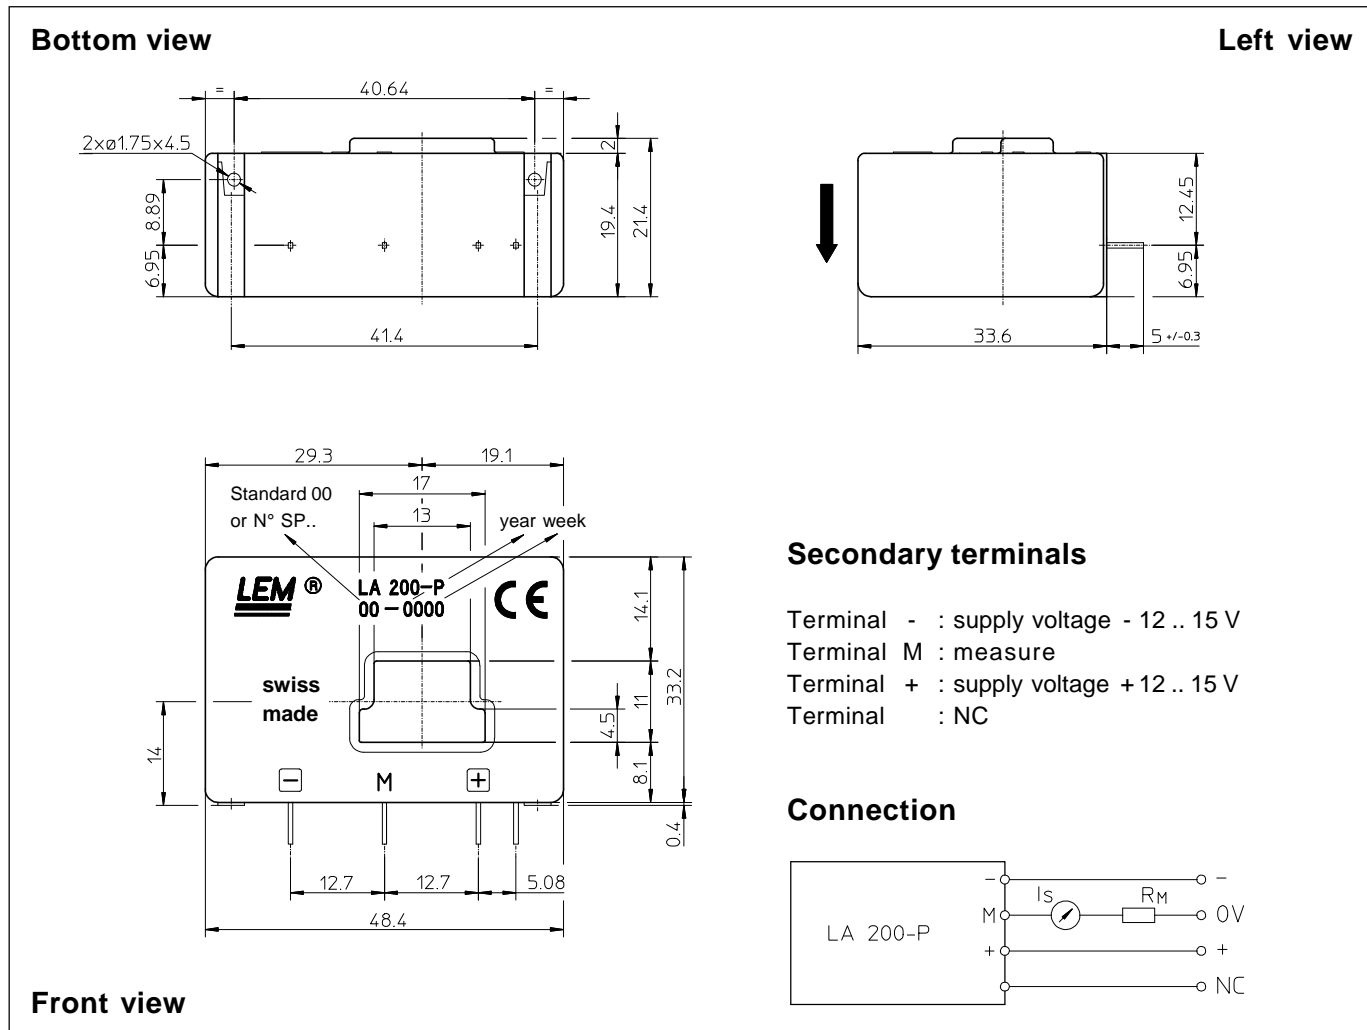

Mechanical characteristics

- General tolerance ± 0.2 mm
- Primary through-hole 17 x 11 mm
- Fastening & connection of primary 4 pins 0.63 x 0.56 mm
- Recommended PCB hole 0.9 mm
- Supplementary fastening 2 holes $\varnothing 1.75$ mm
- Recommended PCB hole 2.4 mm
- Recommended screws KA 22 x 6
- LEM code 47.30.60.006.0

Remarks

- I_s is positive when I_p flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 90°C.
- Dynamic performances (di/dt and response time) are best with a primary bar in low position in the through-hole.
- In order to achieve the best magnetic coupling, the primary windings have to be wound over the top edge of the device.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.