
Product Summary

V_R = 1200 V
I_F = 40A (T_C=150ºC)
Qc = 175nC (V_R=800V)

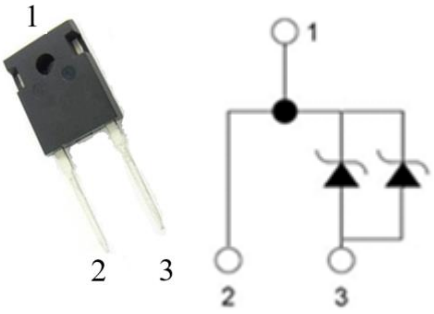

TO-247-2

Features

- Zero Forward/Reverse Recovery Current
- High Blocking Voltage
- High Frequency Operation
- Positive Temperature Coefficient on V_F
- Temperature Independent Switching Behavior
- High surge current capability

Benefits

- Higher System Efficiency
- Parallel Device Convenience without thermal runaway
- Higher Temperature Application
- No Switching loss
- Hard Switching & Higher Reliability
- Environmental Protection

Applications

- Motor Drives
- Solar / Wind Inverters
- AC/DC converters
- DC/DC converters
- Uninterruptable power supplies

Maximum Ratings (T_C=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Value	Unit
Peak Repetitive Reverse Voltage	V_{RRM}		1200	V
Continuous Forward Current	I_F	T_C=25°C T_C=135°C T_C=150°C	110 52 40	A
Non repetitive Forward Surge Current	I_{FSM}	T_C = 25°C, t_p=10 ms, Half Sine Pulse T_C = 110°C, t_p=10 ms, Half Sine Pulse	270 250	A
Repetitive peak Forward Surge Current	I_{FRM}	T_C = 25°C, t_p=10 ms, Freq = 0.1Hz, 100 cycles, Half Sine Pulse T_C = 110°C, t_p=10 ms, Freq = 0.1Hz, 100 cycles, Half Sine Pulse	220 200	A
Total power dissipation	P_D	T_C=25°C T_C=110°C	450 195	W
Single Pulse Avalanche Energy	E_{AS}	L=2mH, I_{AS}=15A	225	mJ
Diode dv/dt ruggedness	dv/dt	V_R = 0-1200V	80	V/ns
Operating Junction Temperature	T_J		-55 to 175	°C
Storage Temperature	T_{STG}		-55 to 175	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

This document is the property of ALPHA POWER SOLUTIONS LIMITED, and not allowed to copy or transformed to other format if not under the authority approval.

Electrical Characteristics

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
DC Blocking Voltage	V_{DC}	T_J = 25°C	1200			V
Forward Voltage	V_F	I_F = 40A, T_J = 25°C		1.43	1.75	V
		I_F = 40A, T_J = 125°C		1.75		V
		I_F = 40A, T_J = 175°C		1.95		V
Reverse Current	I_R	V_R = 1200V, T_J = 25°C		10	150	uA
		V_R = 1200V, T_J = 125°C		30		uA
		V_R = 1200V, T_J = 175°C		71		uA
Total Capacitive Charge	Q_C	V_R = 800V, T_J = 25°C		175		nC
Total Capacitance	C	V_R = 1V, T_J = 25°C, Freq = 1MHz		1967		pF
		V_R = 400V, T_J = 25°C, Freq = 1MHz		166		
		V_R = 800V, T_J = 25°C, Freq = 1MHz		124		

Note: This is a majority carrier diode, so there is no reverse recovery charge

Thermal Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Thermal Resistance	$R_{th(j-c)}$	junction-case		0.33	0.45	^{0}C/W

This document is the property of ALPHA POWER SOLUTIONS LIMITED, and not allowed to copy or transformed to other format if not under the authority approval.

Typical Electrical Curves

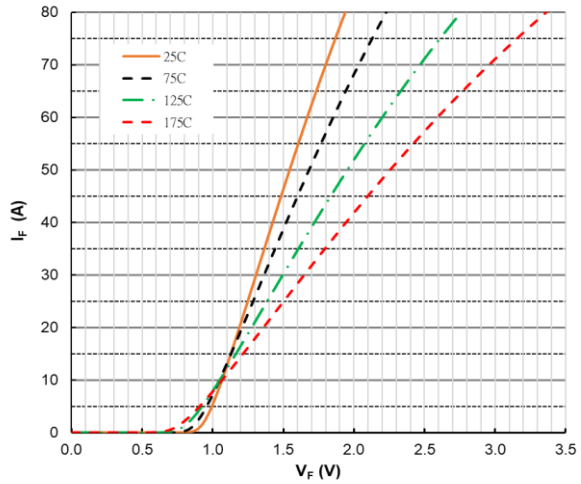


Figure 1. Forward Characteristics

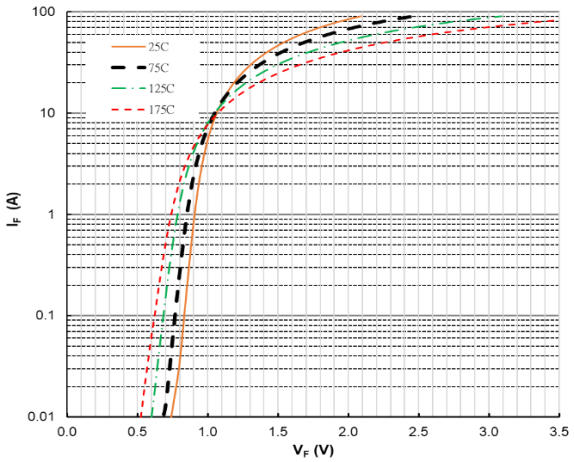


Figure 2. Forward Characteristics

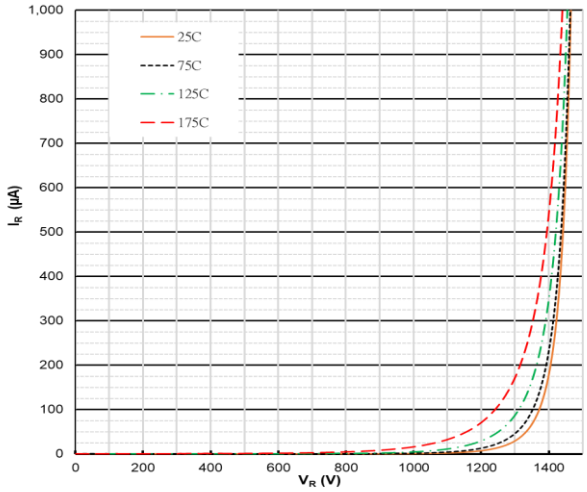


Figure 3. Reverse Characteristics

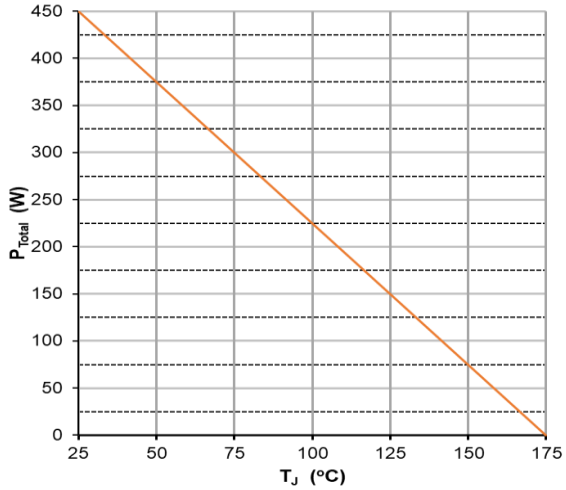


Figure 4. Power Derating

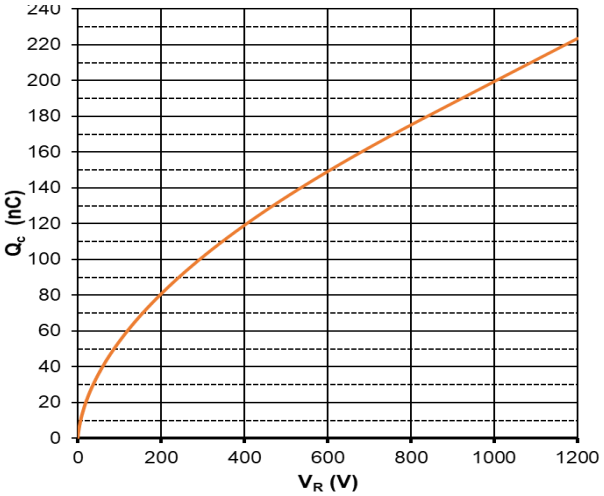


Figure 5. Reverse charge vs. Reverse Voltage


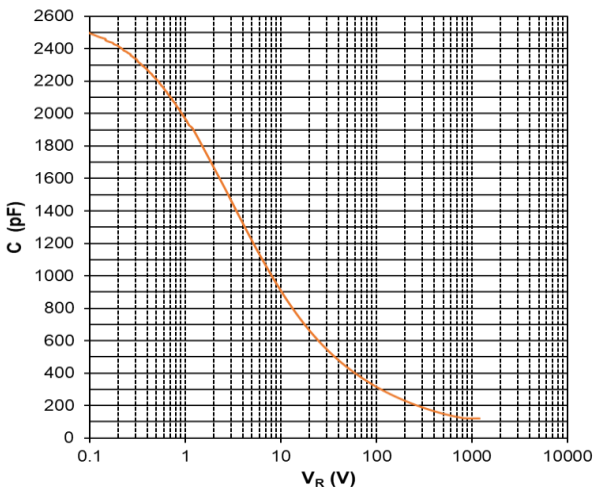


Figure 6. Capacitance vs. Reverse Voltage


This document is the property of ALPHA POWER SOLUTIONS LIMITED, and not allowed to copy or transformed to other format if not under the authority approval.

Package Dimensions


(TO-247-2 Package)

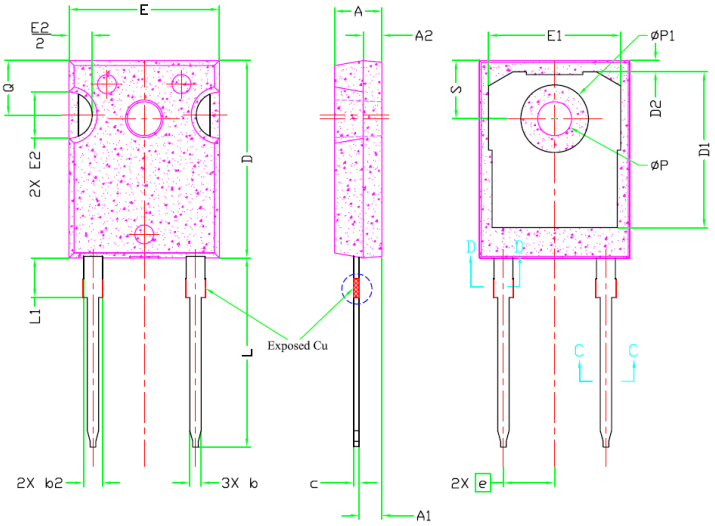

SYMBOL	DIMENSIONS			NOTES
	MIN.	NOM.	MAX.	
A	4.83	5.02	5.21	
A1	2.29	2.41	2.55	
A2	1.50	2.00	2.49	
b	1.12	1.20	1.33	
b1	1.12	1.20	1.28	
b2	1.91	2.00	2.39	6
b3	1.91	2.00	2.34	
c	0.55	0.60	0.69	6
c1	0.55	0.60	0.65	
D	20.80	20.95	21.10	4
D1	16.25	16.55	17.65	5
D2	0.51	1.19	1.35	
E	15.75	15.94	16.13	4
E1	13.46	14.02	14.16	5
E2	4.32	4.91	5.49	3
e	5.44BSC			
L	19.81	20.07	20.32	
L1	4.10	4.19	4.40	6
ØP	3.56	3.61	3.65	7
ØP1	7.19REF.			
Q	5.39	5.79	6.20	
S	6.04	6.17	6.30	



Note:
1. Package Reference: JEDEC TO247, Variation AD.
2. All Dimensions Are In mm.
3. Slot Required, Notch May Be Rounded
4. Dimension D & E Do Not Include Mold Flash. Mold Flash Shall Not Exceed 0.127mm Pre Side. These Dimensions Are Measured At The Outermost Extreme Of The Plastic Body.
5. Thermal Pad Contour Optional Within Dimension D1 & E1.
6. Lead Finish Uncontrolled In L1.
7. ØP To Have A Maximum Draft Angle Of 1.5° To The Top Of The Part With A Maximum Hole Diameter Of 3.91mm.
8. Dimension "b2" And "b4" Does Not Include Dambar Protrusion. Allowable Dambar Protrusion Shall Be 0.10mm Total In Excess Of "b2" And "b4" Dimension At Maximum Material Condition.



Section C–C,D–D

This document is the property of ALPHA POWER SOLUTIONS LIMITED, and not allowed to copy or transformed to other format if not under the authority approval.