



ISO 9001:2008
VITAL
Electrocomp



Google Us : Vital Connectors


Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches

Barrier Type Connectors

Series SWT




Single Way Terminal

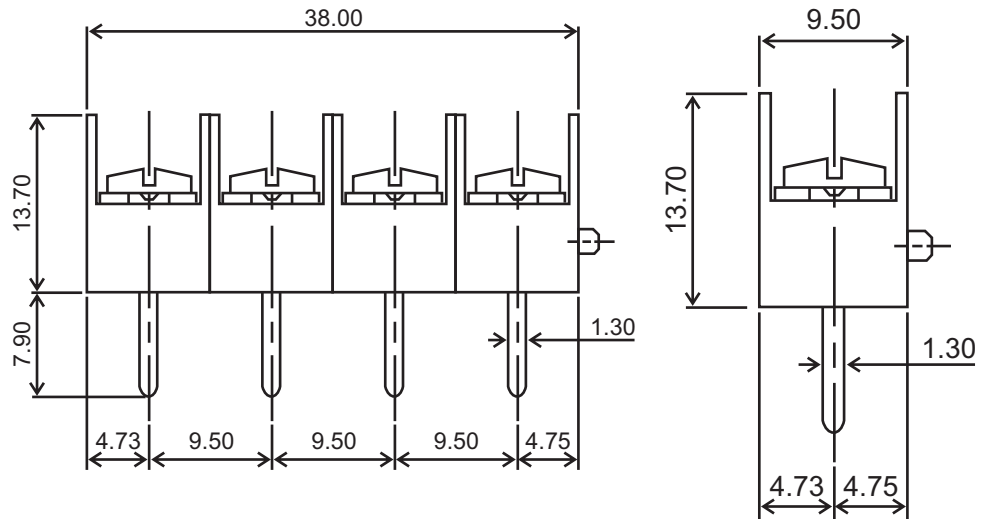

TECHNICAL SPECIFICATIONS :

Pitch	: 9.50 mm x 10.50 mm
Nominal Rating	: 20A/300V
Dielectric Strength	: > 2kV
Moulded Material	: PA66 - UL94 V0 or V2
Insulation Resistance	: > 1000 M Ω @ 500 Vdc
Terminal	: Tin Plated Copper Alloy
Wire Cage	: Nickel Plated Brass
Screw	: M4 - BA : Brass Nickel Plated Suffix "P" : MS Trivalent Zinc Plated Suffix "C"
Wire Size	: 2.5 mm ²
Maximum Torque	: 0.50 - 0.60 Nm

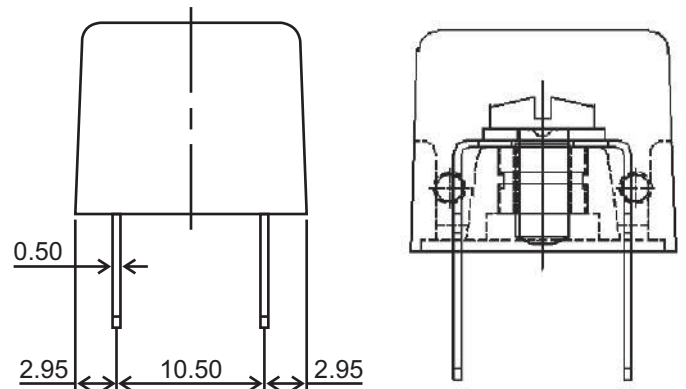

ORDERING CODE

Series	Grade	Colour
--------	-------	--------

→ SWT P Black ←

Grade : P or C

P = Professional Grade

C = Economy Grade

Approval Data

UL : 300V/15A/22-14 AWG

cUL : 300V/15A/22-14 AWG

CE : 300V/20A/22-14 AWG

► The recommended PCB hole diameter is 1.30 mm unless otherwise specified for that product.



Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara - 390010

Landline: 9227979806, Telephone: 9227979801

Email: sales@vitalelectrocomp.com • Web: www.vitalelectrocomp.com

Customized Color Options Available

*Subject to Minimum Order Quantity

Google Us : Vital Connectors